


Technical Data Sheet



PROTRIM

A high-quality 1K acrylic paint suitable for fast repairs on automotive and industrial applications, ideal for restoring the OEM appearance. It has an extremely high content of pigments, solids and special additives that results in excellent hiding-power, film thickness and adhesion on many substrates including bare metal.

Code: PROTRIM

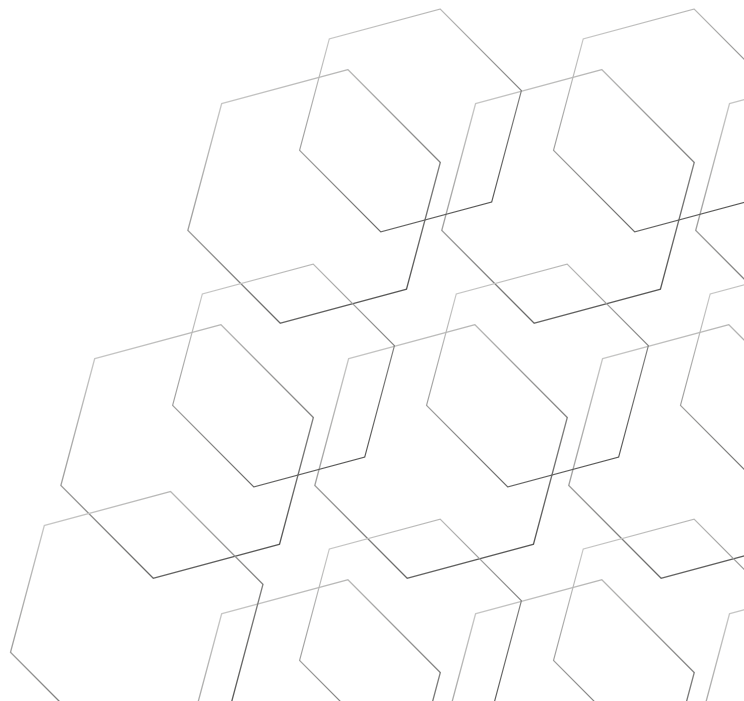

Technical Data

Technical Information

Size	500ML
Basis of binder	Acrylic
Colour	Various
Temperature resistance to	90°C
Theoretical Coverage	1m ²
VOC Directive	2004/42/B(e): Max 840g/l
VOC Content	Max 625.8 g/l in the ready to use form
Storage	Store in a cool dry place in original container between +10°C & +30°C
Shelf Life	10 years when stored in the above conditions

The practical material consumption depends on several factors e.g. geometry of the object, surface formation, application method, spray gun setting, inlet pressure, etc

Application Guide


Substrates

- Old paintwork
- Appropriate primers
- Bare metal* no corrosion protection!

Surface prep

- Clean surface with a suitable degreaser then abrade
- Carry out a test spray (not on the surface to be sprayed)
- Check that the areas to be sprayed are free of grease, dust and are dry
- Wear appropriate respirator

Application



1 Shake for at least 2 minutes before use



4 Drying time 30 minutes



2 Apply 1-2 coats from distance of 250mm



5 After use, turn aerosol upside down and empty valve



3 Allow 2-5 minutes for flash off between coats

Disposal

Completely emptied cans should be put in recycling skips or appropriate container. Cans which are not empty should be disposed of as special refuse.

This application and technical information is given to the best of our knowledge. The notes mentioned herein are, however, non-binding and do not exempt you from own tests to see whether the products supplied by us are suitable for your special application. The use and processing is beyond our control and therefore exclusively is the responsibility of the user.

DISCLAIMER OF LIABILITY

The information contained in this Technical Data Sheet is correct to the best of Alpha Coatings Limited trading as Capella Solutions Group's ("Capella") knowledge, however, you must satisfy yourselves that the Goods are suitable for your needs by way of your independent testing or other processes. Capella makes no warranty, representation, or guarantee regarding the information contained in the Technical Data Sheet or the suitability of its products and services for any particular purpose, nor does Capella assume liability arising out of the application or use of the Goods other than any liability which cannot be limited by law including but not limited to liability for: (a) death or personal injury caused by negligence; (b) fraud or fraudulent misrepresentation; and (c) breach of the terms implied by section 12 of the Sales of Goods Act 1979, in such circumstances Capella's total liability shall not exceed the cost of the Goods. Capella's total liability includes liability in contract, tort, negligence, breach of statutory duty, or otherwise. It is the Customer's responsibility to ensure that the guidance on the Technical Data Sheet is followed.